
Toll Free Phone Email Web +1 888 510 2893 226-400-4101 hello@muddconcrete.com muddconcrete.com




wall mount installation

please carefully read these instructions prior to wall finishing

YOUR WALL MOUNT KIT CONTAINS:

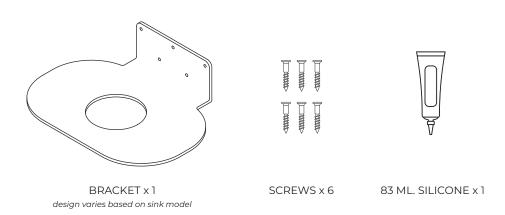


Toll Free Phone Email Web +1 888 510 2893 226-400-4101 hello@muddconcrete.com muddconcrete.com




Install 2x6 timber backing, set back approx. 1/4" from stud face, at desired height. Screw in bracket to timber frame and secure in place.


Note: if mounting directly onto masonry wall, use bolts to secure bracket.



Install wall finishing over timber frame and apply silicone directly onto bracket surface.



Carefully lower and place basin onto siliconed bracket firmly. Remove any excess silicone on the underside of the basin with a microfiber cloth.



Allow silicone to sit and dry for 12 hours prior to installing plumbing fixtures.

After 12 hours, please refer to step 5, 6 and 7 of the *Installation Guide* to complete drain installation.

+1 888 510 2893 226-400-4101 hello@muddconcrete.com muddconcrete.com




hello sink installer

please **carefully** read these instructions prior to install to avoid damage from mishandling and/or improper installation.

Please wait 24 hrs before water testing Do not place tools and fixtures near basin during install


INSTALLATION GUIDE




Cut large enough opening in surface (4" diameter) for plumbing to attach to basin **only**.

Plumbing must attach to basin without interference.


Consequences of improper installation are over-tension causing cracking.



Run a **generous** amount of clear silicone around the underside of the basin 1" back from the outer edge.



Run another **generous** amount of clear silicone 2" back from the drain hole.



Flip and press down onto the surface. Remove excess silicone and wipe clean with a microfiber cloth.



Run a bead of clear silicone to fill the gap between the basin and the surface. Smooth silicone off to a neat finish. Ensure edge is fully water-proofed. Allow silicone to sit and dry for 12 hours prior to installing plumbing fixtures in step 5, 6 and 7.



Run a **generous** amount of clear silicone around the drain rim. It is important that the silicone overflows when drain is placed through the opening.



Slide drain into place and add a **generous** amount of silicone to drain seal or nut underneath. Secure drain by hand tightening no more than a 1/8" turn. **Do not overtighten.**



Carefully push extra silicone around any gaps between drain and sink, as needed.

